

# LC617 MD

LAPEL MICROPHONE



## HIGHLIGHTS ■

### STUDIO-QUALITY SOUND

Flat frequency response for natural sound

### HIGH RF REJECTION

For safe performance even in RF sensitive environment

### MOISTURE-RESISTANT


Reliable operation even in masked use

### UNIFORM POLAR PATTERN

Eliminates feedback

### MICRODOT ADAPTER

Available adapters for most wireless systems

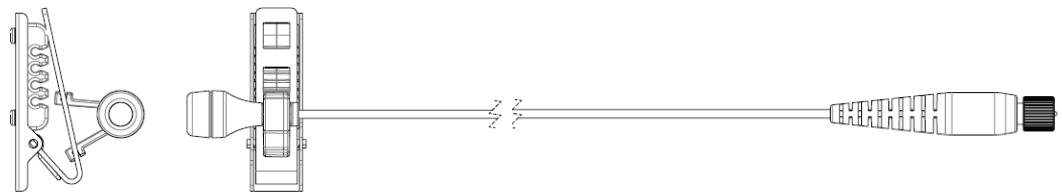

## OVERVIEW ■

After many years of experience with AKG's best sold lapel microphone C417 it was time to use all the learnt facts and create a new generation. The output of this development is the brand new LC617 MD. It is the perfect tool for presenters and actors, being reliable and performing exceptional sound, even in rough environments. More and more wireless systems in the low to mid price range are based on 2,4 GHz technology causing nasty interference with microphones. The new LC617 MD is well protected against those problems.

The main improvements of the new versions are the exceptional RF shielding and the ability to fit to all major wireless systems on the market. AKG offers 2 versions - black and beige. The black one is designed to be worn by presenters with a tie clip on a suit or tie. The beige version is meant to be mounted in an actor's mask.

## APPLICATIONS ■

### PRESENTERS

Perfect tool for all presenters in corporate, education and governmental markets

### ACTORS

Ideal for actors and singers on theater and musical stages

# LC617 MD

LAPEL MICROPHONE



## TECHNICAL SPECIFICATIONS ■

<b>TYPE:</b>	Back-electret condenser
<b>POLAR PATTERN:</b>	Omnidirectional
<b>SENSITIVITY (CARDIOID):</b>	7 mV/Pa
<b>FREQUENCY RESPONSE:</b>	20 Hz to 20 kHz
<b>ELECTRICAL IMPEDANCE:</b>	≤ 200 ohms
<b>RECOMMENDED LOAD IMPEDANCE:</b>	≥ 2000 ohms
<b>EQUIVALENT NOISE LEVEL TO IEC 60268-4:</b>	34 dB(A)
<b>SIGNAL TO NOISE:</b>	60 dB(A) re 1 Pa
<b>MAX. SPL FOR 0.5 % THD:</b>	115 dB
<b>TEMPERATURE RANGE:</b>	-25°C to +60°C (14°F - 140°F)
<b>OPERATION VOLTAGE:</b>	1 V - 10 VDC
<b>CURRENT CONSUMPTION:</b>	≤ 500µA RL=2.2Kohms Vs=2.0VDC
<b>CONNECTOR:</b>	2-pin Microdot
<b>LENGTH:</b>	19 mm
<b>DIAMETER:</b>	8.5 mm
<b>NET WEIGHT:</b>	5.3 g (including cable)

## ORDER SPECIFICATIONS ■

**BOX DIMS:** 140x115x60 mm

**SHIPPING WEIGHT:** 104g

**SKU NAME:** LC617MD black

**SKU NUMBER:** 2577X00200

**UPC:** 885038039020

**EAN:** 9002761039023

**SKU NAME:** LC617MD beige

**SKU NUMBER:** 2577X00210

**UPC:** 885038039037

**EAN:** 9002761039030

## IN THE BOX ■

LC617 MD Microphone

Quick Start Guide

Foam Windscreen

Zip bag

Tie clip in black version / Cable clip in beige version

MDA1 AKG type MiniXLR



## OPTIONAL ACCESSORIES ■

All Microlite adapters fitting most wireless systems on market

Microlite H1 magnet clip



**AKG ACOUSTICS GMBH** LAXENBURGER STRASSE 254, 1230 VIENNA/AUSTRIA.  
**AKG ACOUSTICS, U.S.** 8400 BALBOA BOULEVARD, NORTHBRIDGE, CA 91329, U.S.A.

©2017 HARMAN International Industries, Incorporated. All rights reserved. AKG is a trademark of AKG Acoustics GmbH, registered in the United States and/or other countries. Features, specifications and appearance are subject to change without notice.

[www.akg.com/pro](http://www.akg.com/pro)