

# Sign Loop

- Information sign with integrated inductive loop
- For wall mounting or standing
- Indoor and outdoor
- For application in close-up range, e.g. at information desks, consultation points, intercoms, etc.



The »Sign Loop« is a very simple way to implement an inductive hearing system for close range. It not only indicates that an inductive loop is available - it is the loop itself.

Due to its relatively short „range“, it is particularly suitable for areas with demand for discretion.


The »Sign Loop« can be freely placed or firmly attached to surfaces.

Sign Loop	Item number A-4214-0
Direct current resistance	1.0 Ohm
Recommended area of application *	10 - 60 cm

\*in compliance with the requirements of DIN IEC 60118-4 at 2.5 A loop current

Dimensions	
Width x height x depth (mm)	200 x 200 x 10
Weight	430 g
Connection cable length	approx. 200 cm

Scope of delivery
»Sign Loop«, 2 white cover caps, 2 cantilever pins

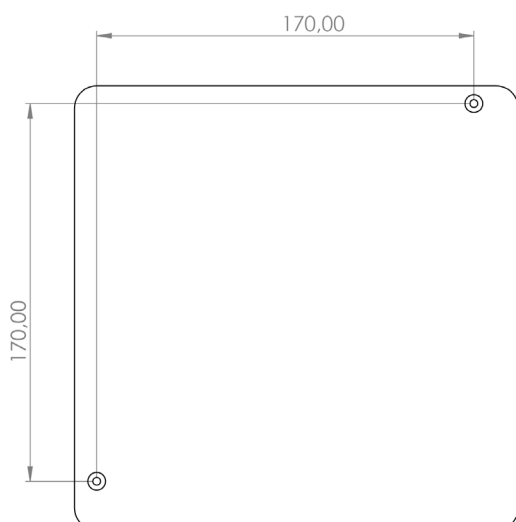

sizes given in mm

