

Model Number: HC-HPAIR2-DUO


The HuddlePod Air2 is the ideal wireless speakerphone with an easy & reliable wireless connection.

Compatibility

- Windows 7/8/8.1/10
- Mac OS X
- Acano
- Adobe Connect
- Blue Jeans
- Cisco Jabber
- Cisco WebEx
- Easymeeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Skype for Business (Lync)
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Zoom.US
- Google Hangouts on Air
- YouTube Live

Features

- 2.4 GHz wireless
- Echo cancellation
- Noise cancellation
- 360° omni-pickup
- Full duplex audio
- Easy to use
- Auto level control
- Two (2) chat pods

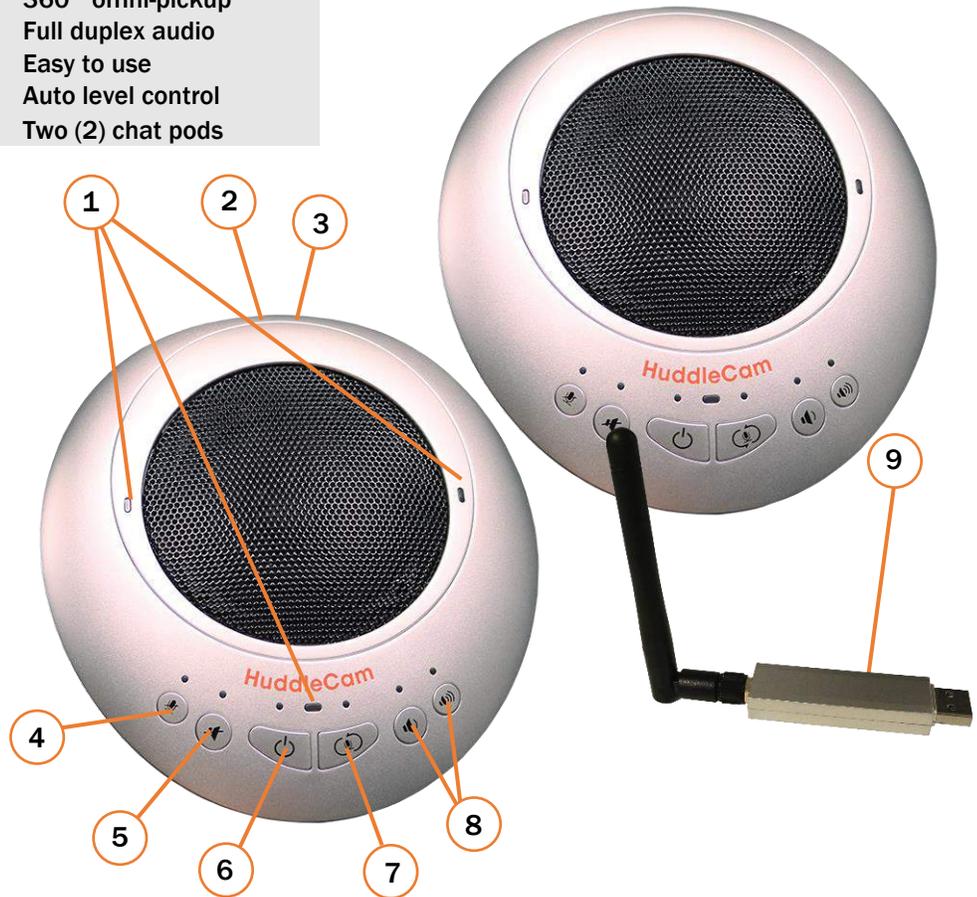

What's in the Box

- (2) HuddlePod Air2 chat pods
- (1) Wireless receiver & antenna
- (2) Travel case (Neoprene)
- (1) User Manual
- (2) USB 2.0 cables (charge & power only)
- (2) USB chargers

- 1. Power LEDs**
Blue LEDs illuminate when power is present
- 2. USB 2.0 Port**
Mini USB port for power & charging
- 3. Audio Output**
3.5mm headphone jack

- 4. Microphone Mute**
Toggle microphone on/off
- 5. Speakerphone Mute**
Toggle chat pod on/off
- 6. Power Button**
Power chat pod on/off

- 7. Microphone Swap**
Swap between the 3 microphones
- 8. Volume Up/Down**
Control speaker volume
- 9. Wireless Receiver**
Durable wireless receiver

Specifications

Microphone Features

Echo Cancellation	256 Channel Echo Cancellation
Audio Output	1/8" TRS Headphone
Noise Cancellation	Intelligent NC up to 16db
Digital EQ	Built-in Digital EQ for stable audio
Battery Life	8-9 Hours, 4-5 hour charge time
Microphone Range	9.8 feet (3m)
Warranty	3 Years

Wireless Speakerphone Specifications (per unit)

Weight:	1.0 lbs (0.45 kg)
Dimensions (in.)	7" L x 6" W x 1.5" H
Dimensions (mm.)	178mm L x 152mm W x 38mm H
Working Environment:	Temp 0~40 °C, Humidity 20% ~ 85%
Compatibility:	MS Win 7/8/8.1/10, Mac 10.5+, Android 4.4+
RF Frequency Range:	2.400 GHz ~ 2.4835 GHz
Certifications:	CE Mark (R & TTE Directive)

Camera Line

	HC-GO-BK		HC-GO-WH	USB-powered, 110° HFOV, all-in-one Camera, Mic, & Speakerphone
	HC3X-BK-G2		HC3X-WH-G2	3X optical zoom, 74° HFOV, USB 2.0 video up to 1080p-30
	HC3XA-BK		HC3XA-WH	3X opt zoom w/ built in mic array, 74° HFOV USB 2.0 video up to 1080p-30
	HC3XW-GY-G2		HC3XW-WH-G2	3X Wide optical zoom, 90° HFOV, USB 3.0 video up to 1080p-30
	HC10X-720-BK		HC10X-720-WH	10X optical zoom, 57° HFOV, USB 2.0 video up to 1080p-30
	HC10XA-BK		HC10XA-WH	10X opt zoom w/ built in mic array, 57° HFOV USB 2.0 video up to 1080p-30
	HC10X-GY-G3		HC10X-WH-G3	10X optical zoom, 61° HFOV, USB 3.0 video up to 1080p-30
	HC20X-GY-G2		HC20X-WH-G2	20X optical zoom, 58° HFOV, USB 3.0 video up to 1080p-30
	HC30X-GY-G2		HC30X-WH-G2	30X optical zoom, 63° HFOV, USB 3.0 video up to 1080p-30
	HC-SIMPLTRACK-TP		HC-SIMPLTRACK-CM	20X optical zoom, 59° HFOV, Auto tracking camera w/ video up to 1080p-60

Control Accessories

	HC-JOY-G2		RS232, RS485, & RS422 3D joystick, VISCA, Pelco-P, Pelco-D
	DB9M-F-xx		VISCA-xx VISCA RS232 Plenum cable, 4 lengths shown in ft. (xx=25, 50, 75, 100)

Mounting Accessories

	HCM-1-BK		HCM-1-WH	Small Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-2-BK		HCM-2-WH	Large Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-1C-WH		HCM-2C-WH	Small/Large open ceiling mount, mounts to 1" NPT pipe
	PT-CM-1-BK		PT-CM-1-WH	Surface Ceiling Mount, mounts directly to ceiling or box w/ supplied hardware

Conference Audio

	HP-AIR-BK		HP-AIR-WH	Wireless Speakerphone with USB receiver
	HP-AIR-BA-BK			Wireless Speakerphone with USB receiver and external amplifier feed
	HP-AIR2-DUO			Dual Wireless Speakerphones with USB receiver

