



2065 Series

BNC Connectors



Product Benefits

Full crimp design

Designed for analog & digital cables

Field Installable

Meets or exceeds HDTV standards


Mechanical

Durability: 500 Cycles Min Center Contact
Center Contact Retention: 6 lbs. Minimum
Coupling Mechanism: 100 lbs. Minimum
Force to Engage/Disengage: Torque 2.5 in.-lbs. Max.;
Longitudinal force 3.0 lbs. Max.
Interface Dimension: MIL-C-39012 except 75 Ohms

Environmental

Thermal Shock: -65°C to +165°C
Moisture Resistance: 0 to 95%: MIL-STD-202
Method 106
Corrosion (Salt Spray): MIL-STD-202 Method 101
Test Condition B
Flammability: UL 94-V0 Rated
(Center Conductor Insulator)
Vibration: MIL-STD-202 Method 204
Test Condition B
Solvent Resistance: MIL-STD-202 Method 215

Outline Drawing (Plug)




Electrical

Characteristic Impedance: 75 Ohms
Voltage Rating: 500 Volts RMS
Return Loss: Less than -36 dB to 1 GHz;
-25 dB to 2 GHz;
-23 dB to 3 GHz;
-20 dB to 5 GHz
Contact Resistance: Center Contact .0014 Ohms
Outer Contact .002 Ohms
Insulation Resistance: 5000 megohms

Finishes


Body/Bayonet: Nickel
Center Conductor: 50 millionths inch gold
plating over copper plate

Typical Return Loss

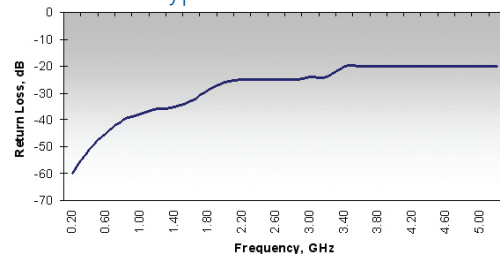

Plugs

KINGS® Part No.	FOR CABLES*				CABLING			Bulk Packs Available?
	Belden	West Penn/ CDT	Gepco	Others	Crimp Die (KTH-1000)	Crimp Die (KTH-5000)	Trim Code	
2065-1-9	9209A				KTH-2261	KTH-5003	3-661-1	
2065-2-9	1505A 1506A 9259	819 25819 815	VPM2000 VPM2000TS VE61859M		KTH-2261	KTH-5003	3-661-1	YES
2065-15-9	8281	P806	VP618PE VP6000 VP618TK	WE 724	KTH-2119	KTH-5002	3-661-4	
2065-7-9	8241		VJ59U	RG-59 RG-210	KTH-2261	KTH-5003	3-661-1	YES
2065-8-9	7731A 8213		VHD1100		KTH-2004	KTH-5004	3-661-3	
2065-10-9	1694A 1695A	6350 256350 WP6355	VSD2001 VSD2001TS		KTH-2325	KTH-5017	3-661-1	YES
2065-11-9	1855A 1865A	HD825 HD25825 WP8255 WP258255	VDM230 VDM250		KTH-2025	KTH-5003	3-661-1	YES
2065-29-9	1279R 1279P				KTH-2276	KTH-5001	3-661-1	YES
2065-28-9	1520A 179DT			RG-179 RG-187	KTH-2258	KTH-5001	3-661-1	YES




Trim Code	A	B	C
3-661-1	.624	.312	.155
3-661-3	.687	.375	.187
3-661-4	.668	.356	.200

*Consult factory for cables
not listed


Within Series Adapters

KINGS® Part Number	Adapter Ends	Dimensions				Mounting Hole
		A		B		
		ln	mm	ln	mm	
2029-9-9	Bulkhead, Jack-Jack	1.28	32.5	0.69 D	17.5 D	A
2029-15-9	Jack-Jack	1.28	32.5	0.44 D	11.2 D	
2029-16-9	Jack-Plug-Jack	1.28	32.5	1.06	26.9	
2029-17-9	Bulkhead, Jack-Jack, iso. ground	1.28	32.5	0.63 D	16.0 D	A
2029-20-9	Jack-Plug, Right Angle	0.90	22.9	1.03	26.2	



Terminations

KINGS® Part Number (True 75 Ohm)	Dimensions				Notes
	A		B		
	ln	mm	ln	mm	
2555-3-32	1.00	25.4	0.57 D	14.5 D	75 ohm, 0.1%, 1/2 watt



Note:

Connectors are designed for use on both analog and digital cable. Consult your cable manufacturer for cable performance data.



Winchester Electronics
199 Park Road Extension - Suite 104
Middlebury, Connecticut 06762
203.741.5400 Phone
203.741.5500 Fax
www.winchesterelectronics.com

September 30, 2013