

Roadworx Sound Masking Solutions RWSM-SURF4. (Loudspeaker)


Sound
Masking



Sound Masking System Surface Loudspeaker



The RWSM-SURF4 is a compact sound masking and paging speaker designed for flush-mounted applications on ceiling tiles or drywall ceilings. It can be powered by a constant voltage amplifier unit of 25 or 70 Volts and many speaker units can be daisy chained for greater sound masking and paging coverage.

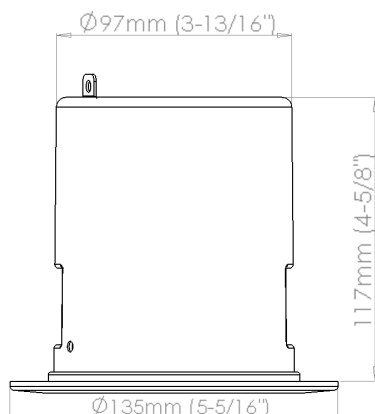

RWSM-SURF4. (Loudspeaker)

Sound Masking System


Surface Loudspeaker



Specifications

Max Power	10 W
Sensitivity	87 dB
Enclosure Material	Steel
Frequency Response	100 Hz to 10 kHz
Connector	Screw Terminal Block
Output Power Selection	4w, 2W, 1W, 1/2w
Driver	9,5 cm (4") full range
Certification	UL 60065 / UL 2043
Chicago CCEA approved	Yes - CCEA version available
Color	White (RAL9016)
Weight	1.2 kg (2.6 lbs)
Shipping Weight	1.6 kg (3.5 lbs)
Box Dimensions	17 x 17 x 18 cm (6¾" x 6¾" x 7")
Attachment	2 Spring
Recommended hole size	100mm (4")

Frequency Response:

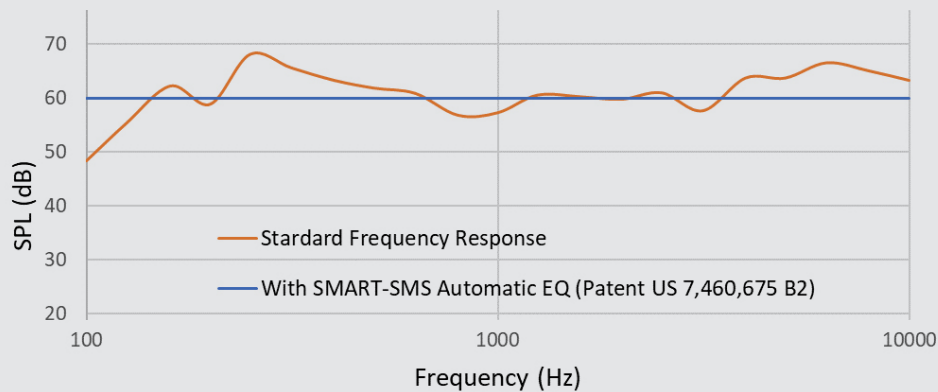

Directivity:

