

Roadworx Sound Masking Solutions RWSM-CTP. (Centralised Control Panel)

Sound
Masking




smartSMS-NET Sound Masking System



- Simple and easy, masking and music volume adjustment in any zone
- 7" Capacitive Touch Screen
- Wall-Mount for sleek design
- Password access
- Ethernet or WiFi connectivity
- Flexible power supply with PoE or 9-36Vdc



On screen volume control to display and access all projects and zones:

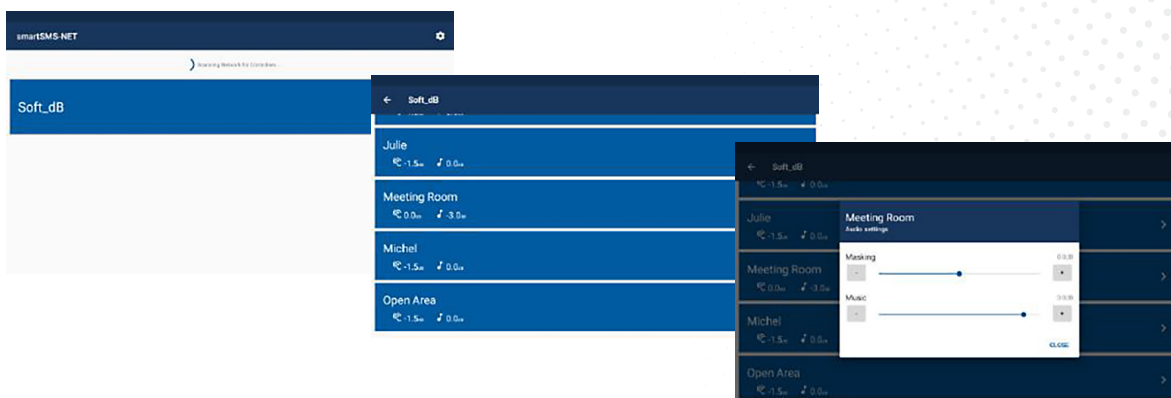

RWSM-CTP (Centralised Control Panel). smartSMS-NET Sound Masking System



Ethernet or WiFi Connectivity:

RWSM-CTP
Control Panel



RWSM-CTP relay
(Router with Private LAN)



SmartSMS-NET controllers



Specifications

Volumes

Sound Masking ±10 dB with respect to calibrated sound masking level

Music 30 dB

Connectivity

Connectivity TCP/IP

Interfaces Ethernet (RJ45) or WiFi (802.11b/g/n, WiFi radio module can be disabled if not required)

Protocol Proprietary

Screen

Size 7 inch (178mm)

Resolution 1024 x 600

Brightness 350 cd/m²

Touch Panel Technology Capacitive

Power

Powering Options PoE or DC barrel connector

DC Barrel Connector 9-36VDC, Power-Supply provided

PoE (Power over Ethernet) 48V, IEEE 802.3.af (optional PoE injector available)

Power Rating Max 15W

RWSM-CTP (Centralised Control Panel). smartSMS-NET Sound Masking System



Specifications

Physical

Size 182mm x 121mm x 25mm (7.2" x 4.75" x 1")

Weight 400g (0.9lb)

Mounting Wall-mount bracket

Options

Locked Guard Box Key-locked clear polycarbonate box, 248mm x 184mm x 86mm (9.75" x 7.25" x 3.33")

PoE Injector 19W IEEE 802.3af PoE injector supporting 10/100 Mbps

Very easy to install with mounting bracket using screws or adhesive pad:

