

# Speaker Cable


## Part No: RW520213CL

Description	83/0.2BC x 2C + PVC Insulation 4.5 x 9.0mm
Applicable Standards	N/A
Suitable Applications	Used to make the electrical connection between loudspeakers and audio amplifiers.

Cable Construction Drawing



Cable Construction Relative Parts

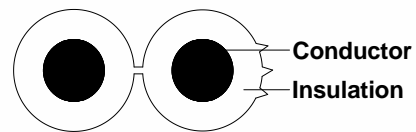

### Cable Description

Conductor	83/0.2+/-0.006BC
Insulation	Core: 2 Material: PVC Colour: Transparent Pink/Black Strip Min. Thickness 0.97mm / Nom. Thickness 1.15mm Nom. O.D H: 4.5+/-0.1mm W: 9.0+/-0.2mm

### Electrical Properties

Conductor Max D.C Resistance	7.7 ohm/km 20°C
------------------------------	-----------------

### Physical Properties

Insulation Elongation	100%
Insulation Tensile Strength	13 N/mm <sup>2</sup>

### Mechanical Properties

Operating Temperature Range	-15 to 70°C
-----------------------------	-------------

Max. Recommended Pulling Tension	365N
----------------------------------	------

Min. Bend Radius (install)	45mm
----------------------------	------

Approximate Mass	8.38kg/100m
------------------	-------------

Sheath Printing	ROADWORX RW520213 Speaker Cable, 2 Conductor, 13AWG (meter marking)
-----------------	---

### Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Pack	Qty Per Pallet
100m	Plastic Reel	10 x 4.5 x 5.5"	2R	

Document Change Record	Issue	Date	Prepared by	Approved By
	Sales	29-03-2013	LLS	Pent
Change History	Issue	Change		