



Part No: RW520213CL

Description	83/0.2BC x 2C + PVC Insulation Φ 4.5 x 9.0mm
Applicable Standards	N/A
Suitable Applications	Used to make the electrical connection between loudspeakers and audio amplifiers.

Cable Construction Drawing

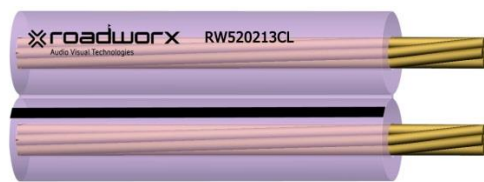

Cable Construction Relative Parts

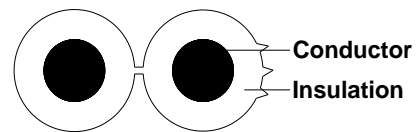

Cable Description

Conductor	83/0.2+/-0.006BC
Insulation	Core: 2 Material: PVC Colour: Transparent Pink/Black Strip Min. Thickness 0.97mm / Nom. Thickness \geq 1.15mm Nom. O.D H: 4.5+/-0.1mm W: 9.0+/-0.2mm

Electrical Properties

Conductor Max D.C Resistance	7.7 ohm/km 20°C
------------------------------	-----------------

Physical Properties

Insulation Elongation	\geq 100%
Insulation Tensile Strength	\geq 13 N/mm ²

Mechanical Properties

Operating Temperature Range -15 to 70°C

Max. Recommended Pulling Tension 365N

Min. Bend Radius (install) 45mm

Approximate Mass 8.38kg/100m

Sheath Printing ROADWORX RW520213 Speaker Cable, 2 Conductor, 13AWG (meter marking)

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Pack	Qty Per Pallet
100m	Plastic Reel	10 x 4.5 x 5.5"	2R	

Document Change Record	Issue	Date	Prepared by	Approved By
	Sales	29-03-2013	LLS	Pent
Change History	Issue	Change		